


Singlemode Patch cords Duplex SC/APC - LC

Features

- Connector type OS2
- Sheath material LSOH
- Nominal diameter core / sheath 9 / 125 μ m
- Outer diameter 3 mm a 2 mm
- Bending radius (static) 45 mm
- Temperature range -20 °C to +70 °C
- Attenuation @ 1310 / 1383 / 1550 nm (dB/km) \leq 0,4 / \leq 0,4 / \leq 0,4

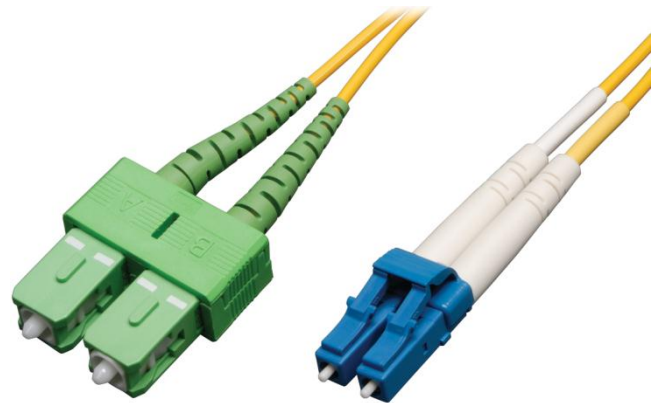

Connector SC/APC Specifications

Items	Specifications
Polishing	APC
Return loss	> 65 dB
Insertion loss	0,15 dB (typical)
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Insertion / extraction cycles	Min. 1000

Connector LC Specifications

Items	Specifications
Polishing	PC
Return loss	\geq 55 dB
Insertion loss	0,15 dB (typical)
Ferrule material	ceramic (zirconia)
Ferrule diameter	1,25 mm
Insertion / extraction cycles	Min. 1000

The information contained within this document must not be copied, reprinted or reproduced in any form. Either wholly or in part, without the written consents of Fumo. The information is believed correct at the time of issue. Fumo reserves the right to amend this specification without notice. Specification is not contractually valid unless specifically authorized by Fumo.

