


Singlemode Adaptor LC/APC Duplex

Related products

- Sliding patch panel for 24 x SC-SC, LC-LC Duplex or E2000-E2000 adapters
- Pigtail LC/APC
- Splice cassette for 16 splices
- Splice protection

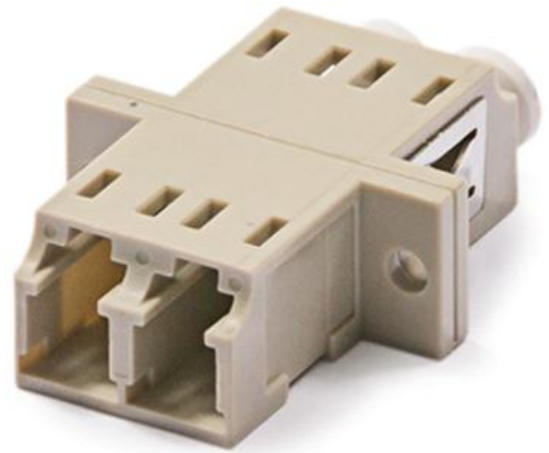

Specifications

Items	Specifications
Housing material	plastic
Alignment sleeve	ceramic (zirconia)
Insertion loss	< 0,2 dB
Durability	500
Operating temperature	-40°C to +80°C

The information contained within this document must not be copied, reprinted or reproduced in any form. Either wholly or in part, without the written consents of Fumo. The information is believed correct at the time of issue. Fumo reserves the right to amend this specification without notice. Specification is not contractually valid unless specifically authorized by Fumo.

