


Singlemode Pigtail SC-APC

Features

- Connector type OS2
- Sliding patch panel for 24 x SC-SC, LC-LC Duplex or E2000-E2000 adapters
- Splice cassette for 16 splices
- Splice protection

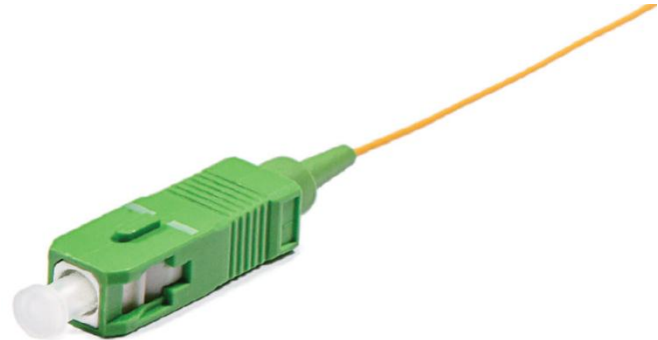

Specifications

Items	Specifications
Connector type	SC/APC (OS2) 9/125 μm
Polishing	APC
Return loss	> 65 dB
Insertion loss	0,15 dB (typical)
Length	2 m
Sheath material	halogen-free secondary EASySTRIP protection of 900 μm
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Temperature range	-20 °C to +60 °C
Outer diameter	900 \pm 5 μm
Bending radius (static)	10 x 0,9 mm
Attenuation @ 850 / 1300 nm (dB/km)	-
Attenuation @ 1310 / 1383 / 1550 nm (dB/km)	\leq 0,4 / \leq 0,4 / \leq 0,4
Bandwidth 850 / 1300 nm (MHz.km)	-

The information contained within this document must not be copied, reprinted or reproduced in any form. Either wholly or in part, without the written consents of Fumo. The information is believed correct at the time of issue. Fumo reserves the right to amend this specification without notice. Specification is not contractually valid unless specifically authorized by Fumo.

