

**Wall mounted cabinet**



**Standard**

Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GBIT3047.2-92 standard

**Feature**

- 19 inch standard;
- Removable Side Panels, side locks optional;
- Knock off hole for entering cable on both top cover, bottom panel, real panel
- Turning angle of front door is over 180 degrees
- Easy mounting installation
- Unassembled package saving shipping space
- fans, shelf, PDU are optional

**Loading Capacity**

80KG

**Degree of Protection**

IP20

**Material**


SPCC Cold Rolled Steel  
Thickness:2.0mm-1.2mm-0.8mm

**Surface Finish**

Powder coating




**Exploded-View**

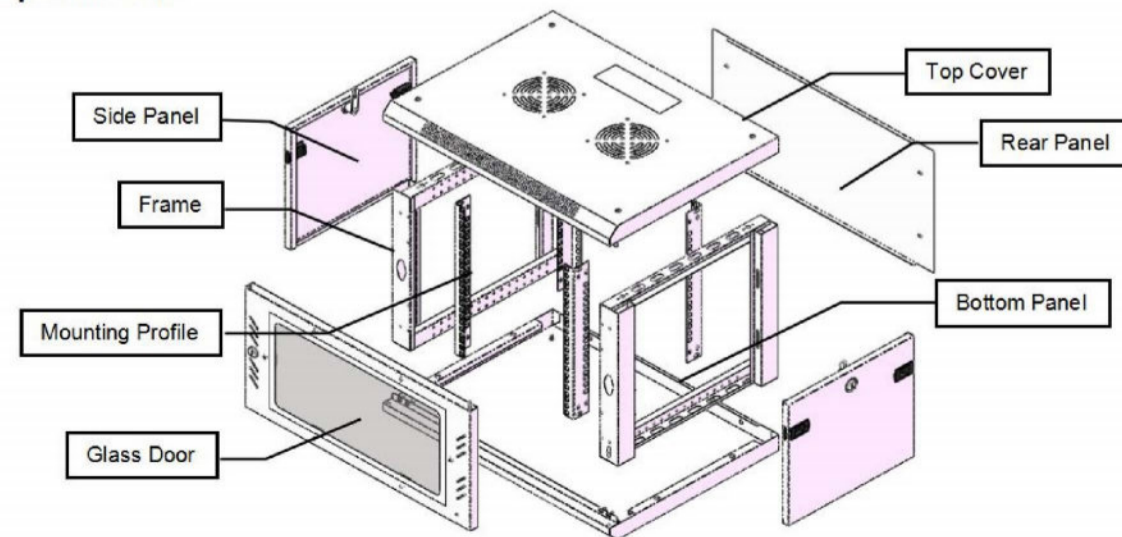

**Wall mounted cabinet**

**Main Dimension**

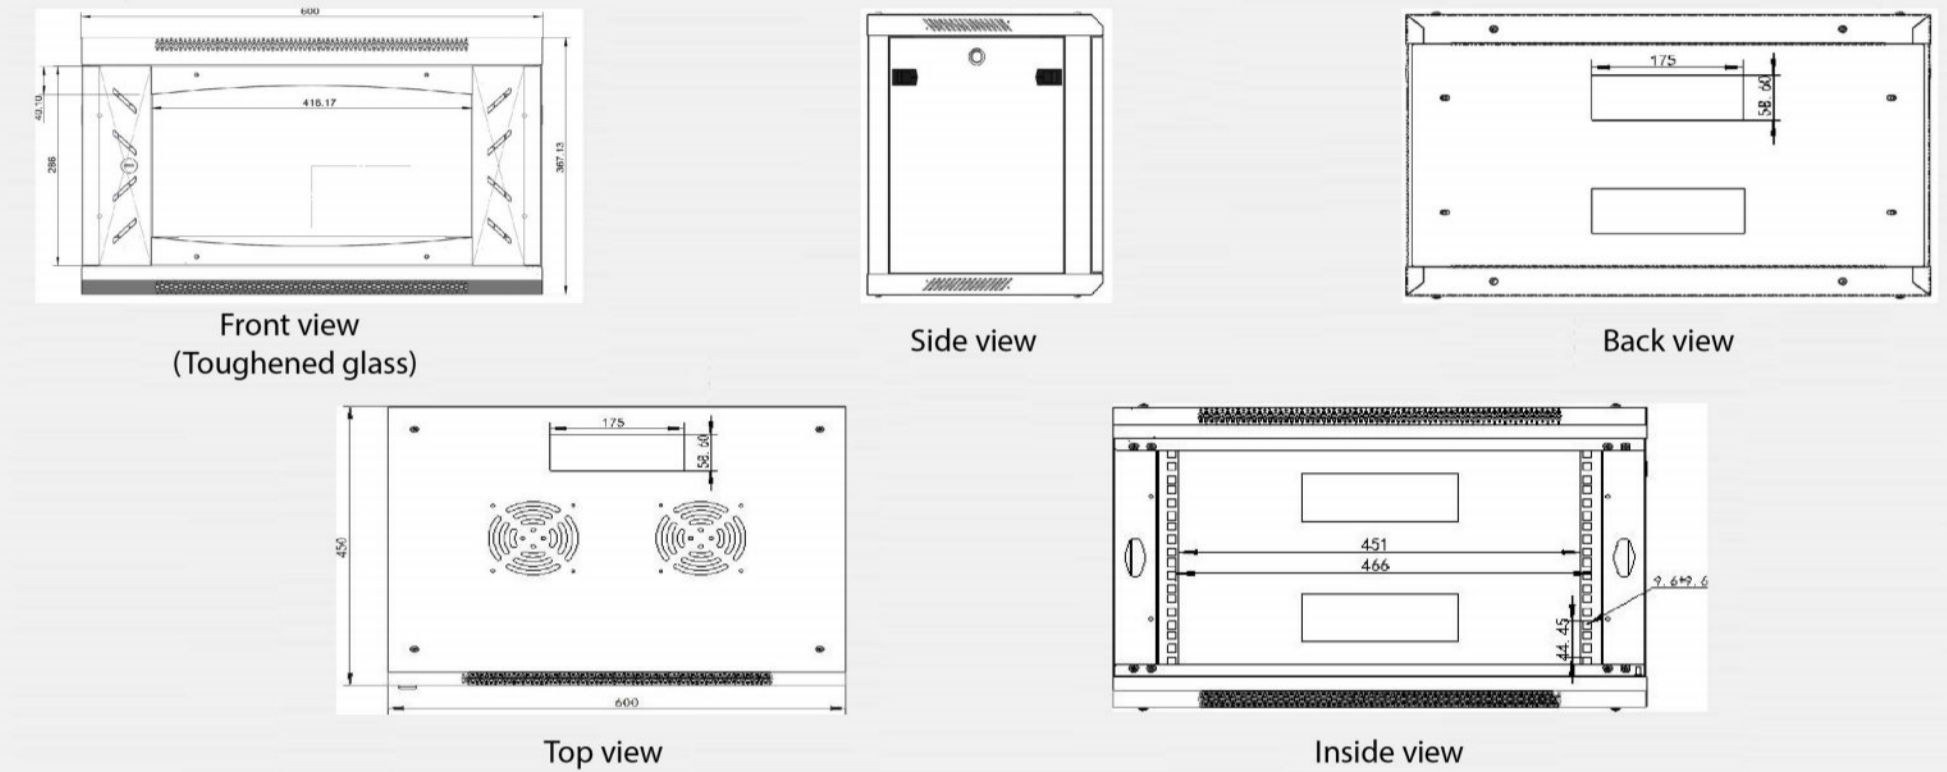

**Main Parts**

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Mounting profile	4	Piece	Coated Zinc plate t2.0	Coated Zinc	with U mark
1	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	
2	Side panel	2	Piece	SPCC cold rolled steel t0.8	Powder coated	
3	Top cover	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
4	Bottom panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
5	Rear panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
6	Front door	1	Piece	5MM toughened glass door/SPCC t1.0	Powder coated	
7	Lock	1	Piece	Steel	Color Zinc	with 2 keys
8	M6 Square nut	12	Piece	Steel	Color Zinc	
9	M6 B-head screw	12	Piece	Steel	Color Zinc	
10	Allen wrench	1	Piece	Steel	Color Zinc	

**Specification**

Model No.	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	Packing Dimension (mm)	Volume (CBM)
HMRC4U6045	4	600	450	280	635*485*160	0.049
HMRC4U6060			600		635*635*230	0.093
HMRC6U6045	6	600	450	368	635*485*160	0.049
HMRC6U6060			600		635*635*230	0.093
HMRC9U6045	9	600	450	501	635*485*235	0.072
HMRC9U6060			600		635*635*231	0.093
HMRC12U6045	12	600	450	635	665*595*236	0.093
HMRC12U6060			600		665*635*231	0.098
HMRC15U6045	15	600	450	769	635*940*98, 802*460*132	0.137
HMRC15U6060			600		635*757*236	0.113
HMRC18U6045	18	600	450	901	635*940*98, 935*460*132	0.137
HMRC18U6060			600		935*630*236	0.139

**Color**

RAL9004	RAL7035
black	grey